

Apple II / II Plus / Euro Plus ROM Replacement Board




The Apple II ROM Replacement board replaces the ROMs on your Apple computer with a single ROM. The replacement ROM allows you to select either Applesoft BASIC, or Integer BASIC by using a jumper.


The boards also helps with troubleshooting in case you have one of more corrupt ROMs.

Installation

Power off your Apple II, and remove the 6 original ROMs in position D0, D8, E0, E8, F0, F8 and also the 74LS138 in F12.

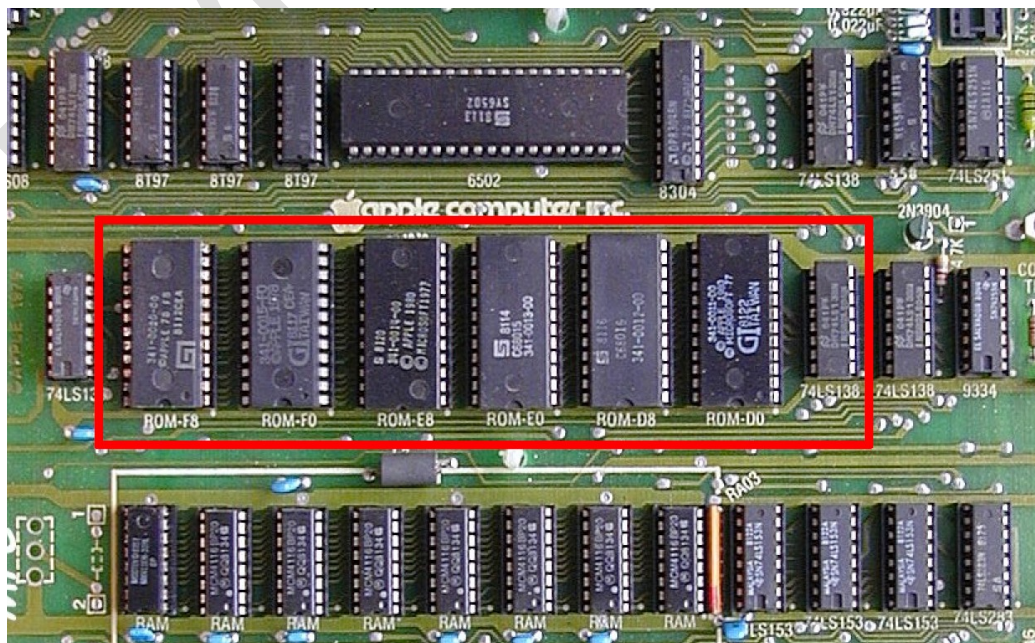

Install the ROM replacement board into sockets D0 and F12.
Make sure the pins are all aligned before pressing into place.

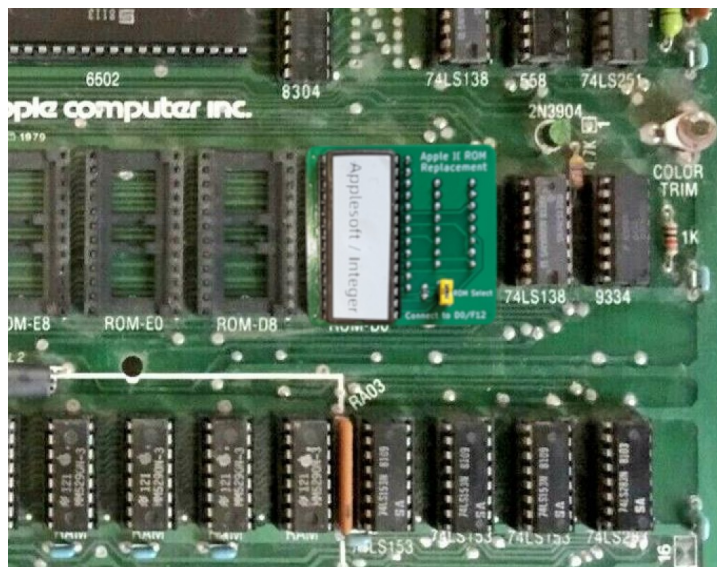

Usage

Using the jumper on the board you can see between Applesoft BASIC (Jumper installed) and Integer BASIC (Jumper removed)

Make sure you power off the Apple before changing the jumper